


ROHS

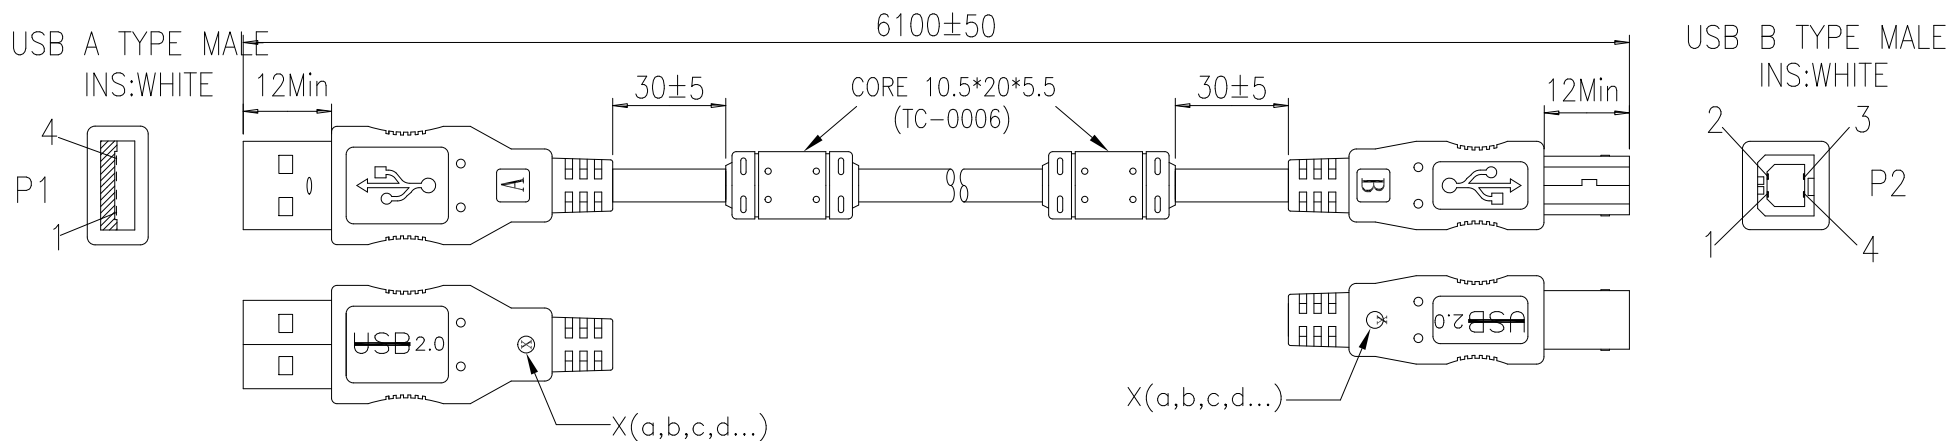

NOTES:

1. CABLE:

UL-2725 [28AWG(7/0.127 T.C)*1PR+20AWG(7/0.32 T.C)*2C
+AL-FOIL/MYLAR+DRAIN WIRE+65% BRAID] PVC JACKET;
OD: $\phi 5.0 \pm 0.15 \text{ mm}$ COLOR: BLACK REV 2.0

2.CONNECTER:

P1:USB A TYPE MALE GOLD PLATED 30u" CONTACT,
GOLD PLATED SHELL REV 2.0.

P2:USB B TYPE MALE GOLD PLATED 30u" CONTACT,
GOLD PLATED SHELL REV 2.0.

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK.

4.ELECTRICLE TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.

<2>CONTACT RESISTANCE 3 Ohms MAX.

<3>INSULATION RESISTANCE 10M Ohms MIN.

5. PACKING: EACH PC / POLYBAG.

PIN OUT

	P1		P2
RED	1	_____	1 VCC
WHITE	2	_____	2 -DATA
GREEN	3	_____	3 +DATA
BLACK	4	_____	4 GROUND
SHELL	<u>DRAIN+BRAID</u>		SHELL

UNIT (mm)	DIM. CLASS	PART NAME			
.0 ±0.30	■ CRITICAL	USB A/M - B/M CABLE REV 2.0			
.00 ±0.15	☒ MAJOR				
.000 ±0.10	() REF.	PART NO.			
ANGLE. ±1°					
3RD.ANGLE'S	DRAW	KENT	CHECK	LUCK	APPROVE JAMES
					
DRAWING NO.	93935	SCALE	SHEET	1/1	REF. I